


## SMD Seam Sealing Crystals 3.2 x 2.5 x 0.7 mm Series

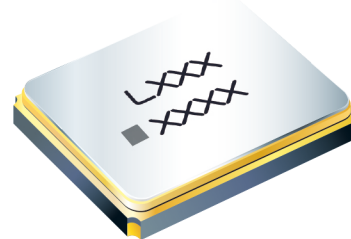

### 产品特点

- 高精度，宽频率范围。
- 降低EMI影响效果非常好。
- 蓝牙，无线通信，DSC，PDA，移动电话的最佳选择。
- 符合RoHS和无铅。

### Features

- High precision and high frequency stability.
- Extremely good for reducing EMI effect.
- The best choice of Bluetooth, wireless communication set, DSC, PDA, and mobile phone.
- RoHS Compliant / Pb Free.


### 电气规格 Electrical Specifications

Item/Type	Description
频率范围 Frequency Range	10 ~ 64 MHz
调整频差 Frequency Tolerance (at 25)	± 10 ppm, ± 30 ppm, or specify
温度频差 Frequency Stability Over Operating Temperature Range	± 10 ppm, ± 30 ppm, or specify
温度范围 Operating Temperature Range	-10 ~ +70 , or specify
静态电容 Shunt Capacitance (C0)	3 pF Max.
激励功率 Drive Level	1 ~200 μW (100 μW typical)
负载电容 Load Capacitance	10 pF, or specify
老化率 Aging (at 25)	± 1 ppm, ± 3 ppm / year Max.
贮存温度 Storage Temperature Range	- 40 ~ + 85 °C

### 等效串联电阻 (ESR) Equivalent Series Resistance(ESR)

Fundamental		3rd Overtone
10 ~ 16 MHz	100Ω Max.	
16 ~ 20 MHz	80Ω Max.	
20 ~ 64 MHz	60Ω Max.	

### 尺寸图 Dimensions

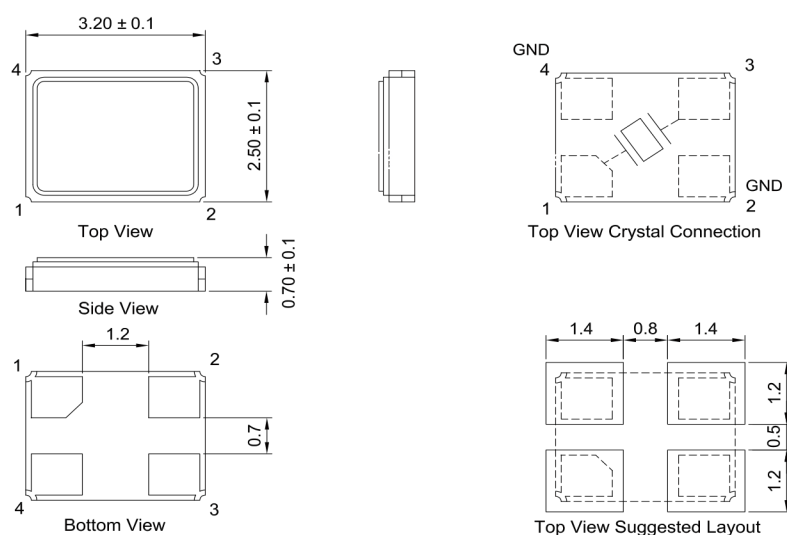

### 物料编码 Material code

