


SMD KHz Crystals 2.0 x 1.2 x 0.6 mm Series



产品特点

- 陶瓷表面贴装封装。
- 在手机应用，笔记本电脑和DSC。
- 符合RoHS和无铅。

Features

- Ceramic surface mount package
- Applications in mobile phone, Notebook and DSC.
- RoHS Compliant / Pb Free.


电气规格 Electrical Specifications

Item/Type	Description
频率范围 Frequency Range	32.768 KHz
调整频差 Frequency Tolerance (at 25)	±10 ppm, ±20 ppm, or specify
温度频差 Frequency Stability Over Operating Temperature Range	±10 ppm, ±20 ppm, or specify
温度范围 Operating Temperature Range	-40 °C~ +85°C or Specify
静态电容 Shunt Capacitance (C0)	1.3pF typical
激励功率 Drive Level	0.5μW Max.
负载电容 Load Capacitance	9pF or 12.5 pF
老化率 Aging (at 25)	±5ppm at first year
贮存温度 Storage Temperature Range	-55 °C ~ +125 °C

等效串联电阻 (ESR) Equivalent Series Resistance(ESR)

Fundamental	3rd Overtone
90K Ω Max.	

尺寸图 Dimensions

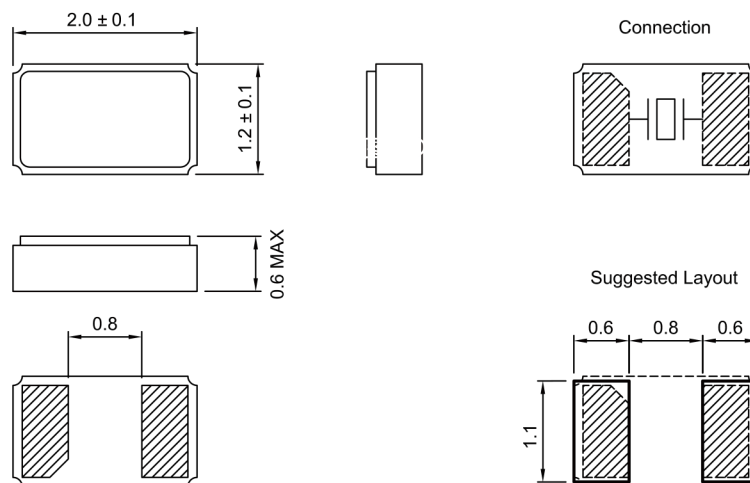

Units: mm

物料编码 Material code

