


## OCXO 21 x 13 mm Dip Type Series



### 产品特点

. 基站和无线通信中的应用。


### Features

. For base station and wireless communication application.

### 电气规格 Electrical Specifications

Item/Type	Description
尺寸 Dimension	21x13 mm Typ.
标称频率 Nominal Frequency [#1]	12.8, 25, 25.6MHz
输出类型 Output Type [#2]	CMOS
输出负载 Output Load	15pF,Typ.
电源电压 Supply Voltage (Vcc)	3.3V
功率消耗 Power Consumption	3.0 W Max. While Warm-Up , 1.25 W Max. at Steady State
预热时间 Warm-up Time	5 Minutes Typ.
初始容差 Initial Tolerance	±0.2 ppm Max.
工作温度 Operating Temperature Range[#4]	- 40 to + 85 °C
控制电压 Control Voltage Range (Vc) [#5]	0 to 3.3 V
频率牵引 Frequency Pulling Range	±1.0 ppm Typ.
线性度 Linearity	10% Max.
电压参考 Voltage Reference	NA

### 尺寸图 Dimensions

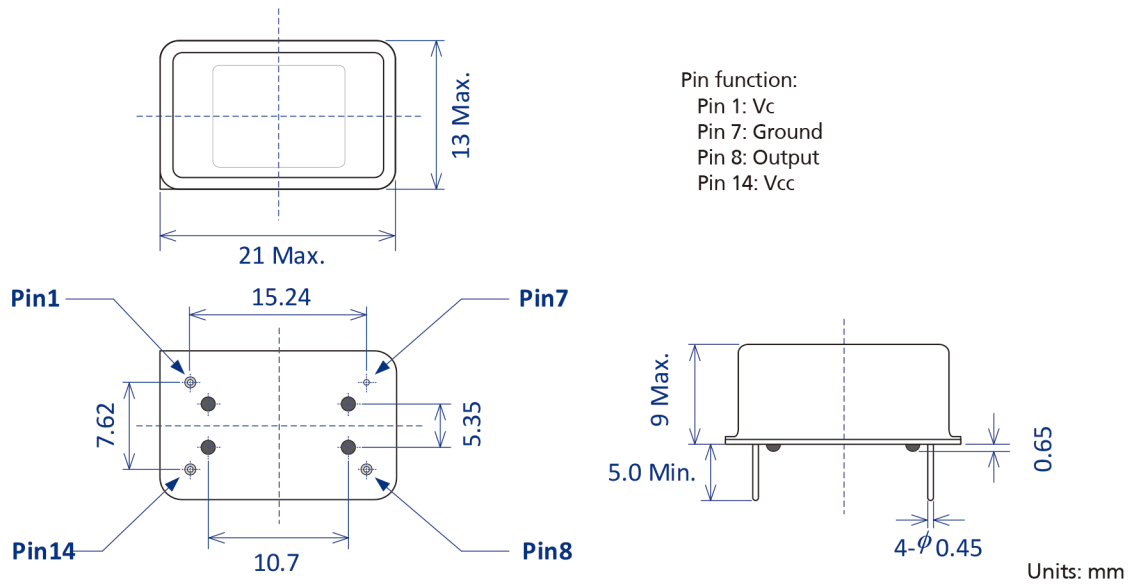

### 物料编码 Material code

