Lucki®
Professional manufacturer of quartz crystal

OCXO
20 x 20 mm
Dip Type Series



产品特点

. 基站和无线通信中的应用。

Features

. For base station and wireless communication application.

电气规格 Electrical Specifications

Item/Type		Description
尺　寸	Dimension	20x20 mm Typ.
标称频率	Nominal Frequency [#1]	38.88 MHz
输出类型	Output Type [#2]	CMOS
输出负载	Output Load	15pF,Typ.
电源电压	Supply Voltage (Vcc)	3.3V,5V
功率消耗	Power Consumption	2.5 W Max. While Warm-Up , 1.0 W Max. at Steady State
预热时间	Warm-up Time	5 Minutes Typ.
初始容差	Initial Tolerance	±0.5 ppm Max.
工作温度	Operating Temperature Range[#4]	- 30 to + 70 ℃
控制电压	Control Voltage Range (Vc) [#5]	0 to 2.5 V
频率牵引	Frequency Pulling Range	±1.0 ppm Typ.
线 性 度	Linearity	10% Max.
电压参考	Voltage Reference	Option : 4V Typ.

尺寸图 Dimensions

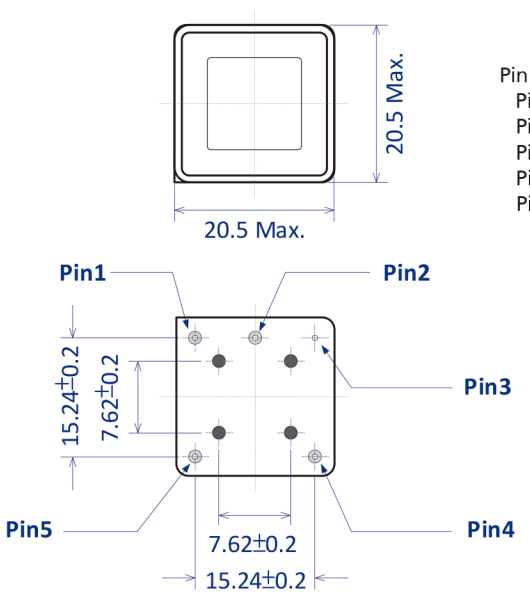

Pin function (AT) :
- Pin 1: Vcc
- Pin 2: Output
- Pin 3: Ground
- Pin 4: Vc
- Pin 5: N.C./Vref (Option)

Pin function (SC):
- Pin 1: Vc
- Pin 2: N.C./Vref (Option)
- Pin 3: Ground
- Pin 4: Output
- Pin 5: Vcc

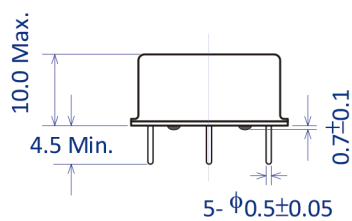

Units: mm

物料编码 Material code

L 2 2 0 O O [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] - [ ] [ ] [ ] [ ] [ ] [ ] [ ]

PAD20.50×20.50

Sense Number
D-Divided M-Multify

Frequencecy(KHz)

Voltage

Frequency Tolerance

CL

ESR